
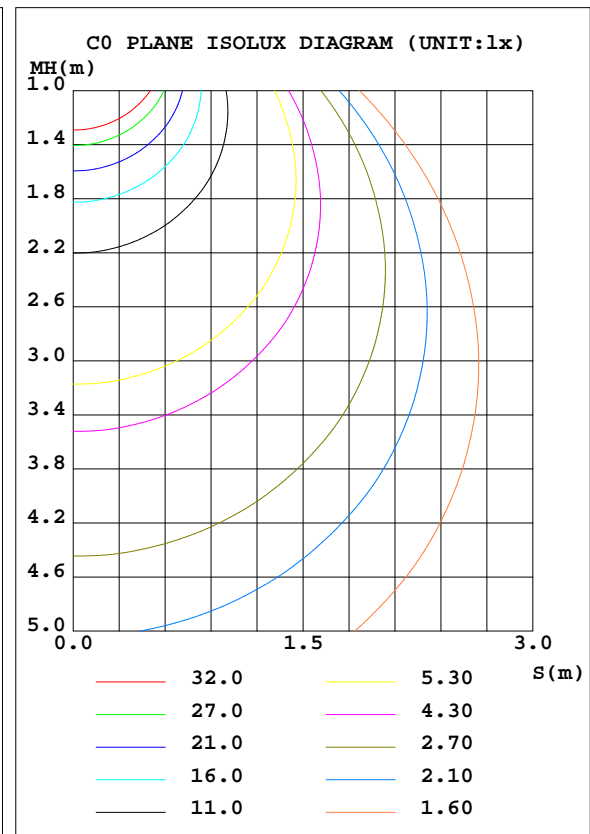


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: x-Glo-T2-48-48vDC-1M	TYPE: /	WEIGHT: 0.325kg/m
SPEC.:	DIM.: 20*12mm	SERIAL No.:
MFR.: CLEAR	SUR.: 20*1000mm	Shielding Angle: /

DATA OF LAMP		PHOTOMETRIC DATA Eff: 133.30 lm/W			
MODEL	2835	I _{max} (cd)	55.60	S/MH(C0/180)	1.22
NOMINAL POWER(W)	2	LOR(%)	99.0	S/MH(C90/270)	1.41
RATED VOLTAGE(V)	48	TOTAL FLUX(lm)	191.95	η UP, DN(C0-180)	5.9,43.2
NOMINAL FLUX(lm)	193.86	CIE CLASS	SEMI-D.	η UP, DN(C180-360)	5.2,44.7
LAMPS INSIDE	1	η up(%)	11.1	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	48	η down(%)	87.9	CIBSE SHR MAX	1.50

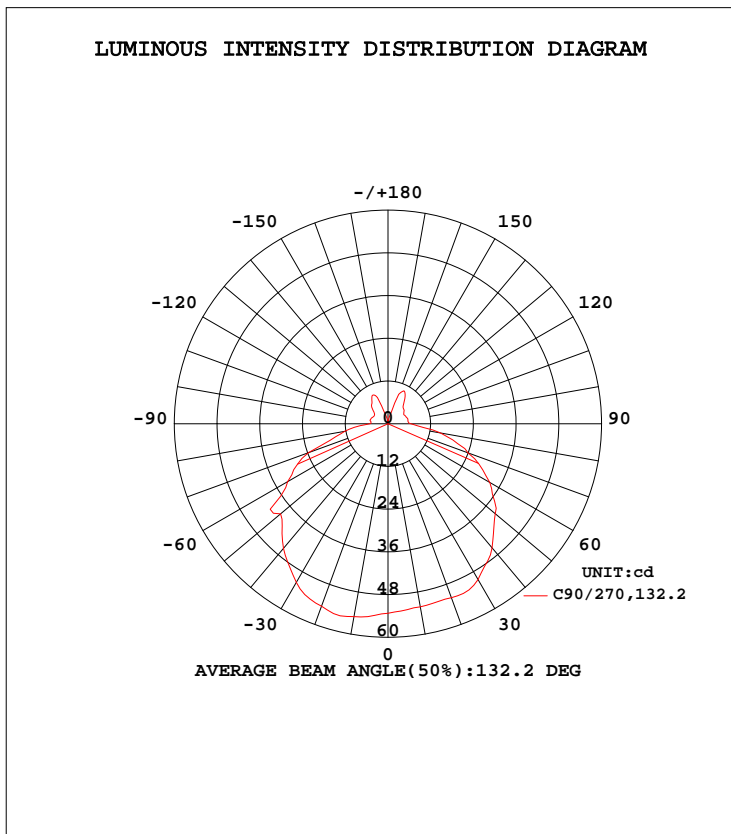

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Dillon
 Test Date:08 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:6.950m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	52.03	51.73	52.22	51.95	52.16	54.07	55.02	53.99	0- 10	5.068	5.068	2.64,2.61
20	48.37	49.37	52.00	49.79	48.71	52.77	54.56	52.65	10- 20	14.75	19.82	10.3,10.2
30	42.75	46.39	50.55	47.00	43.39	49.25	51.50	49.02	20- 30	22.89	42.71	22.3,22
40	35.26	40.84	45.47	41.86	36.15	42.99	45.66	42.78	30- 40	28.01	70.72	36.8,36.5
50	26.31	33.72	39.35	34.69	27.43	36.02	39.40	35.75	40- 50	29.37	100.1	52.1,51.6
60	16.91	25.40	33.05	26.53	18.08	28.17	32.57	27.99	50- 60	27.52	127.6	66.5,65.8
70	8.005	17.67	23.90	18.84	8.885	19.76	23.76	19.45	60- 70	22.01	149.6	78,77.2
80	1.912	10.01	14.96	10.97	2.506	9.803	12.46	9.449	70- 80	14.08	163.7	85.3,84.4
90	0	4.434	6.433	4.792	0.0138	4.120	5.179	3.956	80- 90	6.771	170.5	88.8,87.9
100	0	4.125	5.728	4.325	0.0138	3.649	5.113	3.801	90-100	3.944	174.4	90.9,90
110	0	3.808	5.493	3.870	0	3.329	4.882	3.433	100-110	3.623	178.1	92.8,91.8
120	0	3.676	5.184	3.201	0.0055	2.633	4.507	3.164	110-120	3.060	181.1	94.4,93.4
130	0.0110	4.019	5.955	2.955	0.0056	2.669	5.221	3.774	120-130	2.684	183.8	95.8,94.8
140	0.0166	4.943	6.647	3.042	0.0196	2.823	7.136	4.734	130-140	2.658	186.5	97.1,96.2
150	0.0304	6.527	9.623	3.855	0.0443	3.192	9.069	5.688	140-150	2.678	189.1	98.5,97.6
160	0.0415	5.079	8.805	3.183	0.0388	2.506	5.386	4.256	150-160	2.093	191.2	99.6,98.6
170	0.0581	1.374	1.612	1.201	0.0389	1.062	1.301	1.319	160-170	0.6780	191.9	100,99
180	0.0610	0.0472	0.0363	0.0555	0.0582	0.0513	0.0391	0.0472	170-180	0.0471	191.9	100,99
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 88.426 lm

%lum = 46.1%
%lamp = 45.6%

Conical surface Flux(120deg): 127.62 lm


%lum = 66.5%
%lamp = 65.8%

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Dillon
Test Date:08 June 2023

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:6.950m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: x-Glo-T2-48-48vDC-1M	TYPE: /	WEIGHT: 0.325kg/m
SPEC.:	DIM.: 20*12mm	SERIAL No.:
MFR.: CLEAR	SUR.: 20*1000mm	Shielding Angle: /

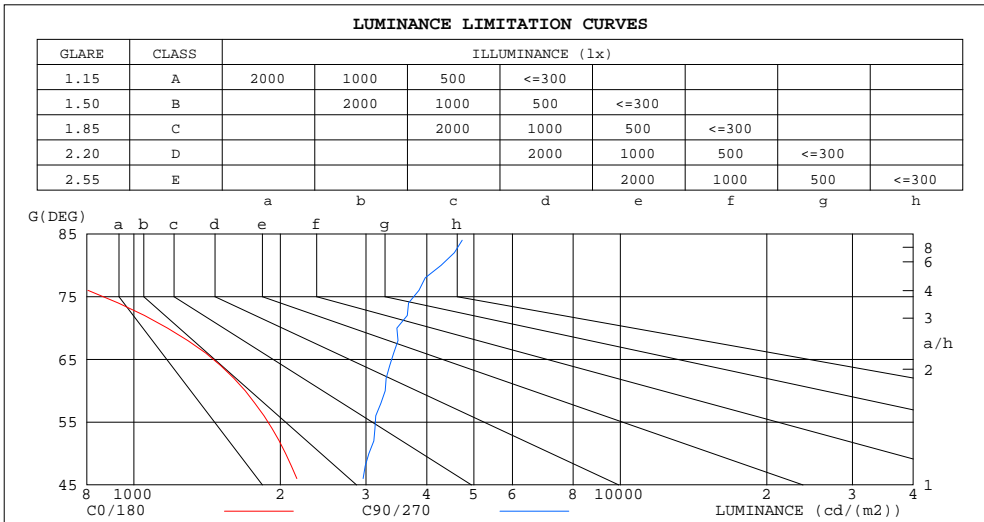

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	303	5675
80	552	4282
75	989	3909
70	1173	3472
65	1566	3482
60	1694	3285
55	1970	3208
50	2051	3042
45	2253	2998


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Dillon
 Test Date: 08 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 6.950m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: x-Glo-T2-48-48vDC-1M	TYPE: /	WEIGHT: 0.325kg/m
SPEC.:	DIM.: 20*12mm	SERIAL No.:
MFR.: CLEAR	SUR.: 20*1000mm	Shielding Angle: /

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.15	1.15	1.15	1.11	1.11	1.11	1.04	1.04	1.04	.97	.97	.97	.91	.91	.91	.88
1.0	.99	.95	.90	.96	.92	.88	.89	.86	.83	.84	.81	.79	.78	.76	.74	.72
2.0	.86	.79	.73	.83	.77	.71	.78	.72	.68	.73	.68	.65	.68	.65	.62	.59
3.0	.75	.67	.60	.73	.65	.59	.68	.62	.56	.64	.58	.54	.60	.55	.52	.49
4.0	.66	.57	.50	.64	.56	.50	.60	.53	.48	.57	.51	.46	.53	.48	.44	.41
5.0	.59	.50	.43	.57	.49	.42	.54	.47	.41	.51	.44	.40	.48	.42	.38	.36
6.0	.53	.44	.37	.51	.43	.37	.48	.41	.36	.46	.39	.34	.43	.38	.33	.31
7.0	.48	.39	.33	.46	.38	.32	.44	.37	.31	.42	.35	.30	.39	.34	.29	.27
8.0	.43	.35	.29	.42	.34	.29	.40	.33	.28	.38	.32	.27	.36	.30	.26	.24
9.0	.40	.32	.26	.39	.31	.26	.37	.30	.25	.35	.29	.24	.33	.28	.24	.22
10.0	.37	.29	.24	.36	.28	.23	.34	.27	.23	.32	.26	.22	.31	.25	.21	.20

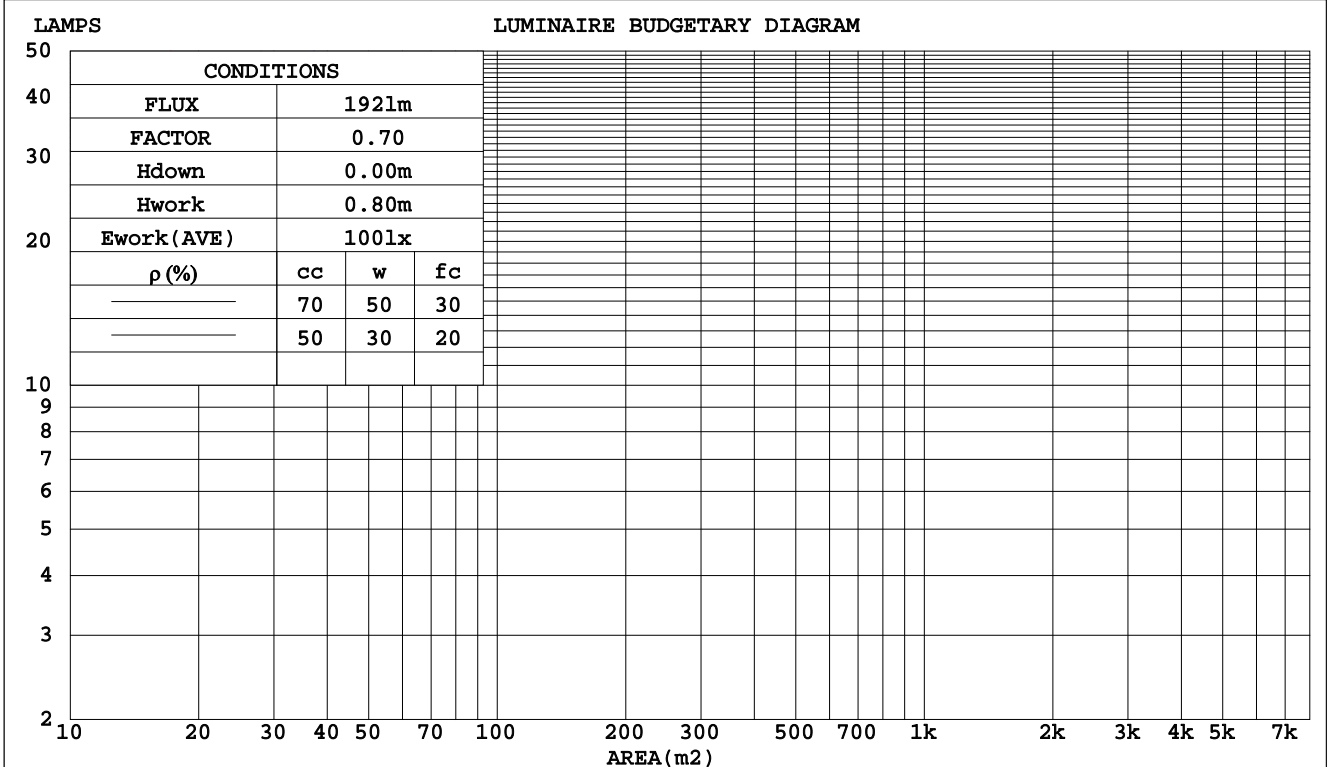

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Dillon
 Test Date: 08 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 6.950m [K=1.0000]
 Remarks:

WEC AND CCEC

NAME: x-Glo-T2-48-48vDC-1M	TYPE: /	WEIGHT: 0.325kg/m
SPEC.:	DIM.: 20*12mm	SERIAL No.:
MFR.: CLEAR	SUR.: 20*1000mm	Shielding Angle: /

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.328	.186	.059	.317	.181	.057	.298	.171	.055	.280	.161	.052	.263	.153	.049	
2.0	.299	.164	.050	.290	.160	.049	.273	.152	.047	.256	.144	.045	.241	.137	.043	
3.0	.273	.145	.044	.265	.142	.043	.249	.135	.041	.235	.129	.039	.221	.122	.038	
4.0	.250	.130	.038	.243	.127	.038	.228	.121	.036	.215	.116	.035	.203	.110	.034	
5.0	.230	.117	.034	.223	.115	.033	.210	.110	.032	.199	.105	.031	.187	.100	.030	
6.0	.213	.107	.031	.206	.104	.030	.195	.100	.029	.184	.096	.028	.174	.091	.027	
7.0	.197	.098	.028	.192	.096	.027	.181	.092	.026	.171	.088	.026	.162	.084	.025	
8.0	.184	.090	.025	.179	.088	.025	.169	.084	.024	.160	.081	.023	.151	.078	.023	
9.0	.172	.083	.023	.167	.082	.023	.159	.078	.022	.150	.075	.022	.142	.072	.021	
10.0	.162	.077	.021	.157	.076	.021	.149	.073	.021	.141	.070	.020	.134	.067	.019	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.273	.273	.273	.233	.233	.233	.159	.159	.159	.091	.091	.091	.029	.029	.029	
1.0	.265	.239	.216	.227	.206	.186	.155	.141	.129	.089	.082	.075	.029	.026	.024	
2.0	.258	.216	.181	.221	.186	.157	.151	.129	.109	.087	.075	.064	.028	.024	.021	
3.0	.250	.199	.159	.214	.172	.138	.147	.119	.097	.085	.070	.057	.027	.023	.019	
4.0	.243	.187	.144	.208	.161	.125	.143	.112	.088	.083	.066	.052	.027	.021	.017	
5.0	.235	.177	.133	.202	.153	.116	.139	.107	.082	.081	.063	.049	.026	.020	.016	
6.0	.228	.168	.126	.196	.146	.109	.135	.102	.077	.079	.060	.046	.025	.020	.015	
7.0	.221	.162	.120	.191	.140	.105	.132	.098	.074	.076	.058	.044	.025	.019	.015	
8.0	.215	.156	.116	.185	.136	.101	.128	.095	.072	.075	.056	.043	.024	.018	.014	
9.0	.209	.151	.113	.180	.131	.098	.125	.092	.070	.073	.055	.042	.024	.018	.014	
10.0	.203	.147	.110	.175	.128	.096	.122	.090	.068	.071	.053	.041	.023	.017	.013	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Dillon
 Test Date:08 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:6.950m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

NAME: x-Glo-T2-48-48vDC-1M	TYPE: /	WEIGHT: 0.325kg/m
SPEC.:	DIM.: 20*12mm	SERIAL No.:
MFR.: CLEAR	SUR.: 20*1000mm	Shielding Angle: /

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.7	21.1	20.1	21.5	21.9	22.2	23.6	22.7	24.0	24.4
3H	20.7	22.0	21.1	22.4	22.9	24.4	25.6	24.8	26.1	26.5
4H	21.0	22.2	21.4	22.6	23.1	25.4	26.6	25.8	27.0	27.5
6H	21.1	22.2	21.5	22.7	23.2	26.3	27.4	26.8	27.9	28.4
8H	21.0	22.2	21.5	22.6	23.2	26.7	27.8	27.2	28.3	28.8
12H	21.0	22.1	21.5	22.6	23.1	27.0	28.1	27.6	28.6	29.1
4H 2H	20.7	21.9	21.2	22.4	22.9	22.6	23.9	23.1	24.3	24.8
3H	21.9	23.0	22.5	23.5	24.0	25.0	26.1	25.5	26.6	27.1
4H	22.4	23.4	22.9	23.9	24.4	26.2	27.2	26.7	27.7	28.2
6H	22.6	23.5	23.2	24.0	24.6	27.3	28.2	27.9	28.7	29.3
8H	22.7	23.5	23.3	24.0	24.7	27.8	28.7	28.4	29.2	29.8
12H	22.7	23.4	23.3	24.0	24.6	28.3	29.0	28.9	29.6	30.2
8H 4H	23.2	24.0	23.8	24.6	25.2	26.4	27.2	27.0	27.7	28.4
6H	23.7	24.4	24.3	25.0	25.6	27.8	28.4	28.4	29.0	29.7
8H	23.9	24.5	24.5	25.1	25.8	28.4	29.0	29.1	29.6	30.3
12H	24.0	24.5	24.6	25.1	25.8	29.0	29.5	29.7	30.2	30.9
12H 4H	23.4	24.1	24.0	24.7	25.3	26.4	27.1	27.0	27.7	28.3
6H	24.1	24.7	24.7	25.3	25.9	27.8	28.4	28.4	29.0	29.7
8H	24.3	24.9	25.0	25.5	26.2	28.5	29.1	29.2	29.7	30.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.2				
2.0H	+ 0.2 / - 0.5					+ 0.2 / - 0.2				

CIE Pub.117, 193.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -5.7)
 Area: 0.02 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Dillon
 Test Date:08 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:6.950m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

NAME: x-Glo-T2-48-48vDC-1M	TYPE: /	WEIGHT: 0.325kg/m
SPEC.:	DIM.: 20*12mm	SERIAL No.:
MFR.: CLEAR	SUR.: 20*1000mm	Shielding Angle: /


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	52	40	34	51	40	33	49	39	33	26
0.80	62	50	42	60	49	42	58	48	41	34
1.00	70	58	51	68	57	50	65	58	49	41
1.25	77	66	58	75	65	57	71	62	56	47
1.50	82	71	64	80	70	63	75	67	61	52
2.00	89	80	72	86	78	71	81	74	69	59
2.50	93	84	78	90	82	76	85	78	73	62
3.00	97	89	83	93	87	81	88	82	78	66
4.00	101	94	89	97	92	87	91	87	83	71
5.00	103	98	93	100	95	91	94	90	86	74
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Dillon
 Test Date:08 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:6.950m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: x-G10-T2-48-48vDC-1M	TYPE: /	WEIGHT: 0.325kg/m
SPEC.:	DIM.: 20*12mm	SERIAL No.:
MFR.: CLEAR	SUR.: 20*1000mm	Shielding Angle: /

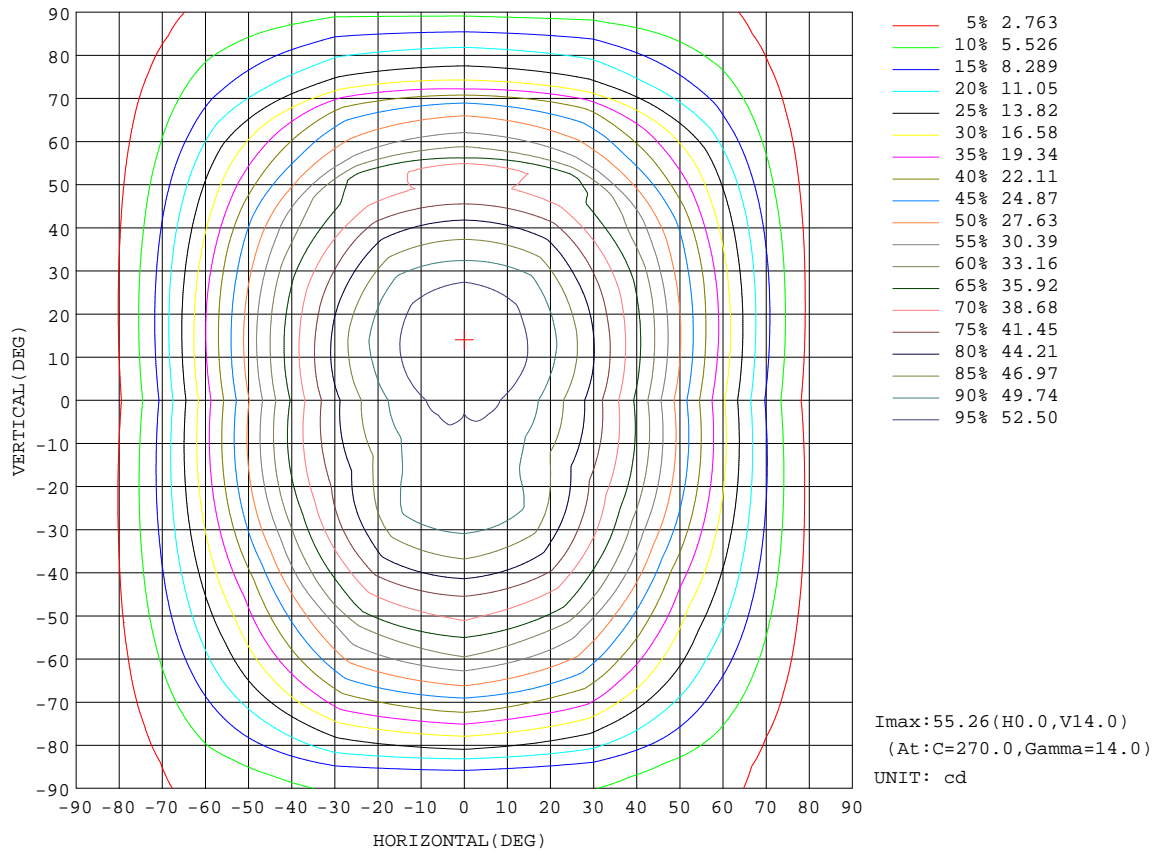


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Dillon
 Test Date: 08 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 6.950m [K=1.0000]
 Remarks:

AAI Figure

NAME: x-Glo-T2-48-48vDC-1M	TYPE: /	WEIGHT: 0.325kg/m
SPEC.:	DIM.: 20*12mm	SERIAL No.:
MFR.: CLEAR	SUR.: 20*1000mm	Shielding Angle: /

Flux out:145.8 lm

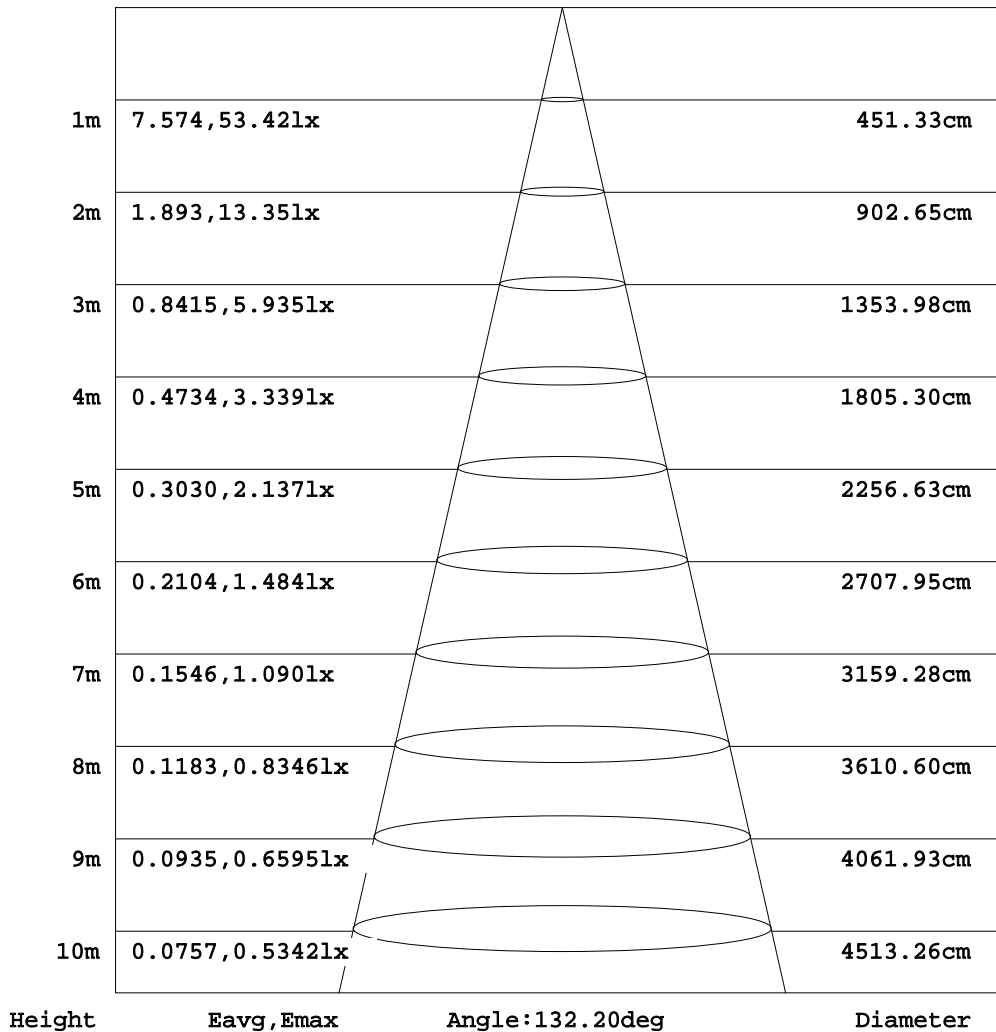


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Dillon
 Test Date:08 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:6.950m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: x-Glo-T2-48-48vDC-1M	TYPE: /	WEIGHT: 0.325kg/m
SPEC.:	DIM.: 20*12mm	SERIAL No.:
MFR.: CLEAR	SUR.: 20*1000mm	Shielding Angle: /

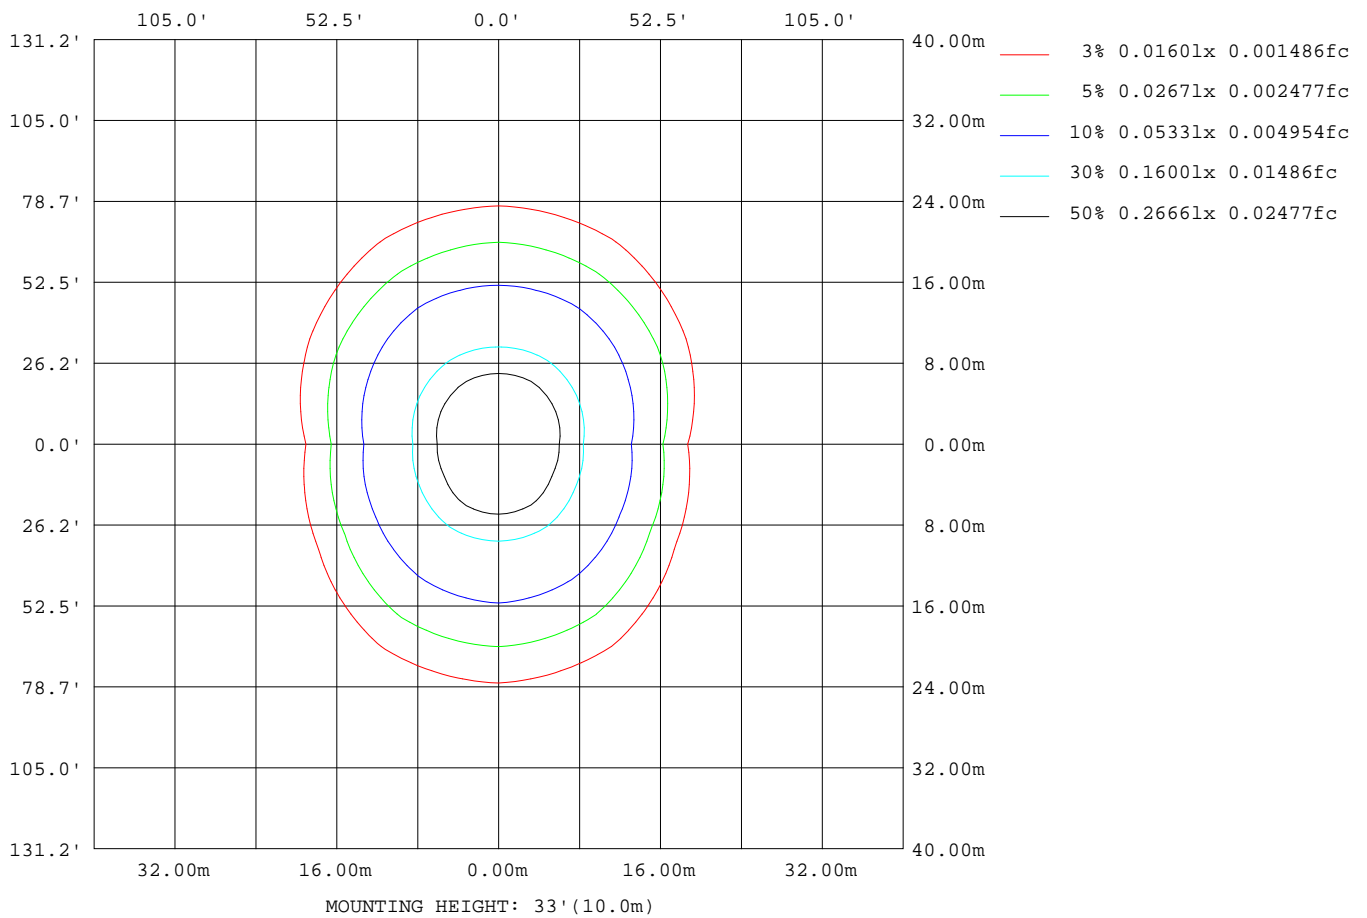

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Dillon
 Test Date: 08 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 6.950m [K=1.0000]
 Remarks:

LED Avg.L Report

NAME: x-Glo-T2-48-48vDC-1M	TYPE: /	WEIGHT: 0.325kg/m
SPEC.:	DIM.: 20*12mm	SERIAL No.:
MFR.: CLEAR	SUR.: 20*1000mm	Shielding Angle: /


AvgL	cd/m2
L_0~180(65)av	1516
L_0~180(75)av	936
L_0~180(85)av	284
L_90~270(65)av	3399
L_90~270(75)av	3431
L_90~270(85)av	5072
L_45(65)av	2753
L_45(75)av	2781
L_45(85)av	3945

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Dillon
 Test Date:08 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:6.950m [K=1.0000]
 Remarks:

Planar Illuminance Curve

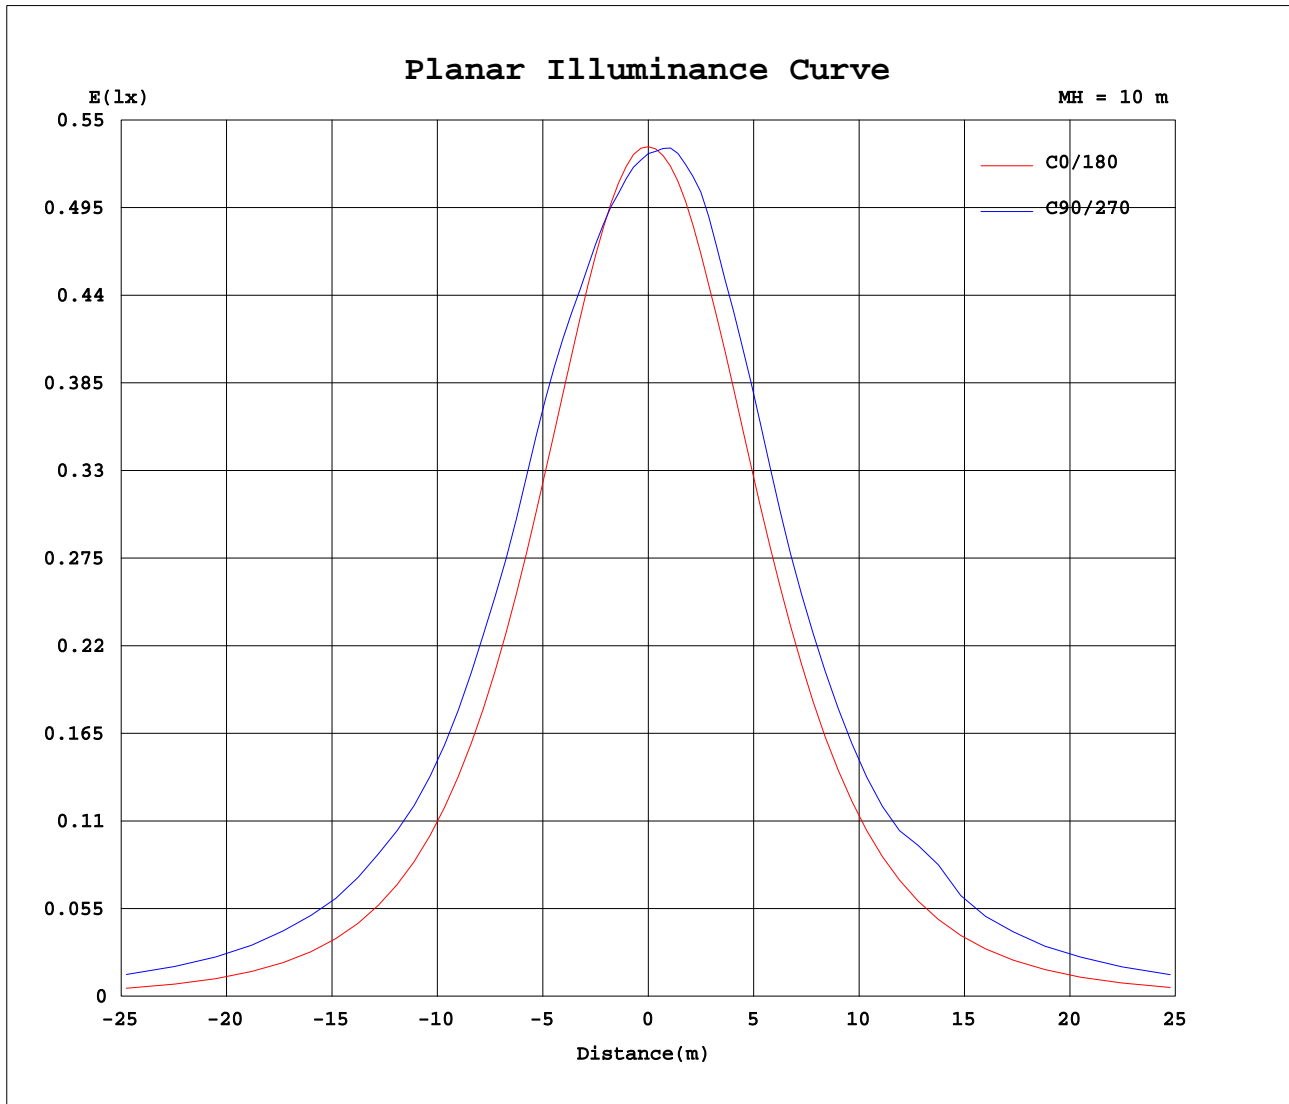

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Dillon
 Test Date: 08 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 6.950m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: x-Glo-T2-48-48vDC-1M	TYPE: /	WEIGHT: 0.325kg/m
SPEC.:	DIM.: 20*12mm	SERIAL No.:
MFR.: CLEAR	SUR.: 20*1000mm	Shielding Angle: /

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	53.2	53.2	53.2	53.2	53.2	53.2	53.2	53.2	53.2	53.2	53.2	53.2							
5	53.1	52.8	52.7	52.7	52.8	52.8	53.1	53.3	53.7	53.9	53.7	53.4							
10	52.0	51.7	51.8	52.2	52.0	51.9	52.2	53.5	54.7	55.0	54.6	53.4							
15	50.8	50.5	51.3	52.0	51.7	50.7	50.9	53.0	54.9	55.6	54.7	52.9							
20	48.4	48.3	50.4	52.0	50.9	48.7	48.7	51.5	54.1	54.6	53.8	51.5							
25	46.4	46.5	50.4	52.2	50.7	47.2	46.8	50.3	52.8	53.9	52.7	50.1							
30	42.7	43.6	49.2	50.6	49.6	44.4	43.4	47.6	50.9	51.5	50.9	47.2							
35	40.0	41.4	47.3	48.5	47.8	42.5	40.8	45.0	48.9	49.1	48.8	44.5							
40	35.3	37.9	43.8	45.5	44.4	39.3	36.1	41.0	45.0	45.7	45.0	40.5							
45	31.8	35.0	41.2	42.7	41.9	36.4	32.8	38.3	42.5	42.9	42.3	37.9							
50	26.3	30.2	37.2	39.4	37.8	31.6	27.4	33.9	38.2	39.4	38.0	33.5							
55	22.6	26.7	34.3	37.0	35.2	28.1	23.7	30.6	37.1	40.9	37.4	30.1							
60	16.9	21.1	29.7	33.1	30.6	22.5	18.1	25.7	30.6	32.6	30.5	25.5							
65	13.2	17.8	26.8	29.6	27.7	19.2	14.3	22.0	27.6	29.5	27.3	21.6							
70	8.00	13.5	21.8	23.9	22.7	14.9	8.89	16.6	22.9	23.8	22.6	16.3							
75	5.11	10.9	18.3	20.4	19.4	12.3	5.85	13.2	17.0	16.9	16.3	12.7							
80	1.91	7.10	12.9	15.0	13.6	8.30	2.51	8.02	11.6	12.5	11.4	7.54							
85	0.53	5.05	8.96	9.95	9.81	6.01	0.98	5.72	8.94	9.52	8.65	5.23							
90	0.00	3.28	5.59	6.43	5.88	3.71	0.01	3.28	4.96	5.18	4.77	3.14							
95	0.00	3.19	5.23	5.79	5.38	3.55	0.00	3.10	4.51	4.81	4.51	3.06							
100	0.00	3.05	5.21	5.73	5.25	3.40	0.01	2.83	4.47	5.11	4.78	2.82							
105	0.00	2.88	5.14	5.76	4.73	3.21	0.01	2.69	4.52	5.09	4.62	2.71							
110	0.00	2.71	4.90	5.49	4.90	2.84	0.00	2.39	4.27	4.88	4.35	2.51							
115	0.00	2.66	4.74	5.37	4.74	2.52	0.00	2.05	4.12	4.67	4.18	2.33							
120	0.00	2.68	4.67	5.18	4.20	2.20	0.01	1.75	3.51	4.51	4.01	2.32							
125	0.00	2.67	4.92	5.38	3.96	2.09	0.00	1.76	3.31	4.58	4.11	2.44							
130	0.01	2.76	5.28	5.96	4.00	1.91	0.01	1.73	3.61	5.22	4.81	2.74							
135	0.00	2.95	5.46	6.09	3.86	1.91	0.02	1.69	3.88	6.15	5.62	2.88							
140	0.02	3.58	6.31	6.65	3.90	2.19	0.02	1.67	3.98	7.14	6.37	3.10							
145	0.00	4.00	7.45	7.72	4.40	2.45	0.04	1.91	4.19	7.66	6.99	3.46							
150	0.03	4.23	8.83	9.62	4.88	2.83	0.04	2.17	4.21	9.07	7.91	3.47							
155	0.02	3.91	8.67	10.3	4.70	2.74	0.03	2.15	3.86	9.04	7.76	3.14							
160	0.04	2.93	7.23	8.80	3.97	2.39	0.04	1.78	3.23	5.39	6.18	2.33							
165	0.04	1.87	5.42	3.45	3.12	1.88	0.05	1.39	2.60	2.85	4.63	1.63							
170	0.06	0.31	2.44	1.61	1.76	0.64	0.04	0.61	1.52	1.30	2.10	0.54							
175	0.04	0.06	0.42	0.18	0.39	0.17	0.06	0.24	0.56	0.48	0.70	0.17							
180	0.06	0.04	0.05	0.04	0.06	0.06	0.06	0.05	0.05	0.04	0.04	0.05							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Dillon
 Test Date:08 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:6.950m [K=1.0000]
 Remarks: