
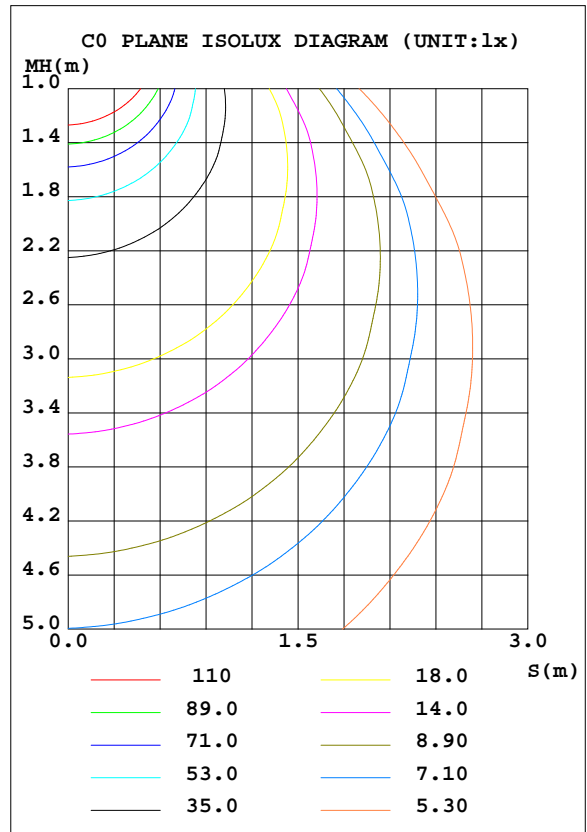


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: x-Glo-44-36vDC-1M	TYPE: /	WEIGHT: 0.129kg/m
SPEC.:	DIM.: 6*15.5mm	SERIAL No.:
MFR.: CLEAR	SUR.: 15.5*1000mm	Shielding Angle: /

DATA OF LAMP		PHOTOMETRIC DATA Eff: 124.14 lm/W			
MODEL	2835	I _{max} (cd)	185.0	S/MH(C0/180)	1.24
NOMINAL POWER(W)	5.5	LOR(%)	101.4	S/MH(C90/270)	1.46
RATED VOLTAGE(V)	36	TOTAL FLUX(lm)	625.67	η UP, DN(C0-180)	2.6, 46.5
NOMINAL FLUX(lm)	616.88	CIE CLASS	DIRECT	η UP, DN(C180-360)	2.8, 49.5
LAMPS INSIDE	1	η up(%)	5.5	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	36	η down(%)	96.0	CIBSE SHR MAX	1.55

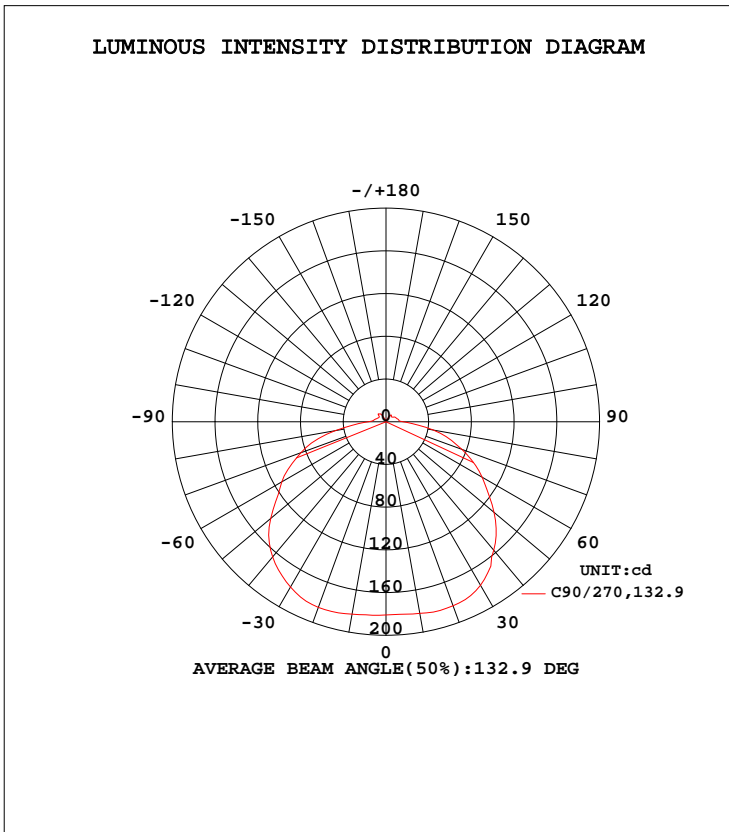

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Dillon
 Test Date:25 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:6.950m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	174.7	178.8	182.2	179.5	180.0	180.7	183.0	180.1	0- 10	17.22	17.22	2.75,2.79
20	161.7	174.2	183.5	175.8	169.8	176.9	185.0	176.4	10- 20	50.45	67.67	10.8,11
30	142.8	163.2	176.9	164.4	150.1	167.3	178.8	167.3	20- 30	78.78	146.4	23.4,23.7
40	118.4	143.7	157.1	146.2	127.5	149.2	165.2	149.1	30- 40	97.51	244.0	39,39.5
50	92.05	118.8	132.2	121.7	102.0	125.7	140.9	125.9	40- 50	103.4	347.4	55.5,56.3
60	60.33	88.12	104.1	91.13	72.36	96.12	112.7	97.03	50- 60	94.87	442.2	70.7,71.7
70	31.00	57.98	75.71	60.88	43.14	66.63	84.70	66.85	60- 70	75.64	517.9	82.8,83.9
80	9.274	31.99	44.84	34.53	19.26	39.17	48.18	37.58	70- 80	50.77	568.6	90.9,92.2
90	0.2622	11.68	16.13	12.40	5.144	14.66	16.61	13.30	80- 90	23.27	591.9	94.6,96
100	0.1934	9.188	11.90	8.358	0.1988	9.008	11.26	9.598	90-100	10.17	602.1	96.2,97.6
110	0.4561	7.568	10.29	6.983	0.1633	6.761	9.130	7.161	100-110	7.575	609.6	97.4,98.8
120	0.6943	5.364	8.997	4.575	0.1826	4.124	7.880	5.491	110-120	5.546	615.2	98.3,99.7
130	0.9403	4.043	7.200	3.223	0.2934	4.432	8.790	5.787	120-130	3.955	619.1	99,100
140	1.275	3.573	8.042	2.944	0.4400	3.531	9.595	4.752	130-140	3.335	622.5	99.5,101
150	1.511	1.199	5.358	1.228	1.101	1.755	5.550	2.082	140-150	2.128	624.6	99.8,101
160	1.602	0.7853	0.7621	0.7176	1.190	1.122	1.198	1.113	150-160	0.6701	625.3	99.9,101
170	1.577	0.8406	0.7595	0.7862	1.395	1.203	0.8057	0.9019	160-170	0.2882	625.6	100,101
180	1.536	1.057	0.8272	0.8629	1.541	1.034	0.8272	0.8521	170-180	0.0966	625.7	100,101
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 306.15 lm

%lum = 48.9%
 %lamp = 49.6%

Conical surface Flux(120deg): 442.23 lm


%lum = 70.7%
 %lamp = 71.7%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Dillon
 Test Date:25 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:6.950m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: x-Glo-44-36vDC-1M	TYPE: /	WEIGHT: 0.129kg/m
SPEC.:	DIM.: 6*15.5mm	SERIAL No.:
MFR.: CLEAR	SUR.: 15.5*1000mm	Shielding Angle: /

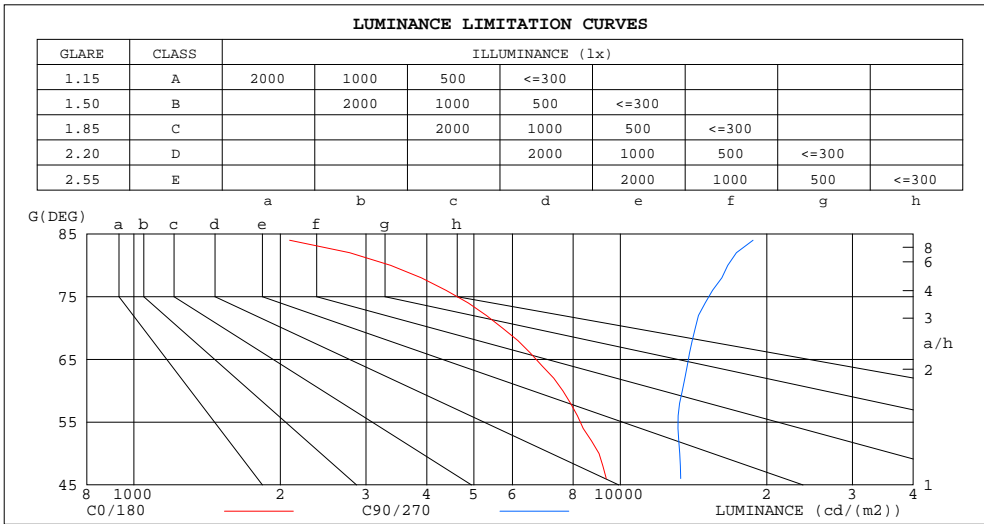

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2506	22484
80	3373	16634
75	5186	15917
70	5724	14261
65	7156	14240
60	7620	13412
55	8596	13459
50	9044	13247
45	9663	13528


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Dillon
 Test Date: 25 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 6.950m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: x-Glo-44-36vDC-1M	TYPE: /	WEIGHT: 0.129kg/m
SPEC.:	DIM.: 6*15.5mm	SERIAL No.:
MFR.: CLEAR	SUR.: 15.5*1000mm	Shielding Angle: /

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.04	1.04	1.04	.98	.98	.98	.96
1.0	1.03	.98	.94	.90	.95	.92	.94	.91	.88	.89	.87	.84	.85	.83	.81	.78
2.0	.89	.81	.75	.86	.80	.74	.82	.76	.71	.78	.73	.69	.74	.70	.67	.64
3.0	.78	.69	.62	.75	.67	.61	.72	.65	.59	.68	.62	.57	.65	.60	.56	.53
4.0	.68	.59	.52	.67	.58	.51	.63	.56	.50	.60	.54	.49	.57	.52	.48	.45
5.0	.61	.51	.45	.59	.51	.44	.57	.49	.43	.54	.47	.42	.52	.46	.41	.39
6.0	.55	.45	.39	.53	.45	.38	.51	.43	.37	.49	.42	.37	.47	.41	.36	.34
7.0	.49	.40	.34	.48	.40	.34	.46	.39	.33	.44	.37	.32	.42	.36	.32	.30
8.0	.45	.36	.30	.44	.36	.30	.42	.35	.29	.41	.34	.29	.39	.33	.28	.26
9.0	.41	.33	.27	.40	.32	.27	.39	.31	.26	.37	.31	.26	.36	.30	.26	.24
10.0	.38	.30	.24	.37	.29	.24	.36	.29	.24	.35	.28	.23	.33	.27	.23	.21

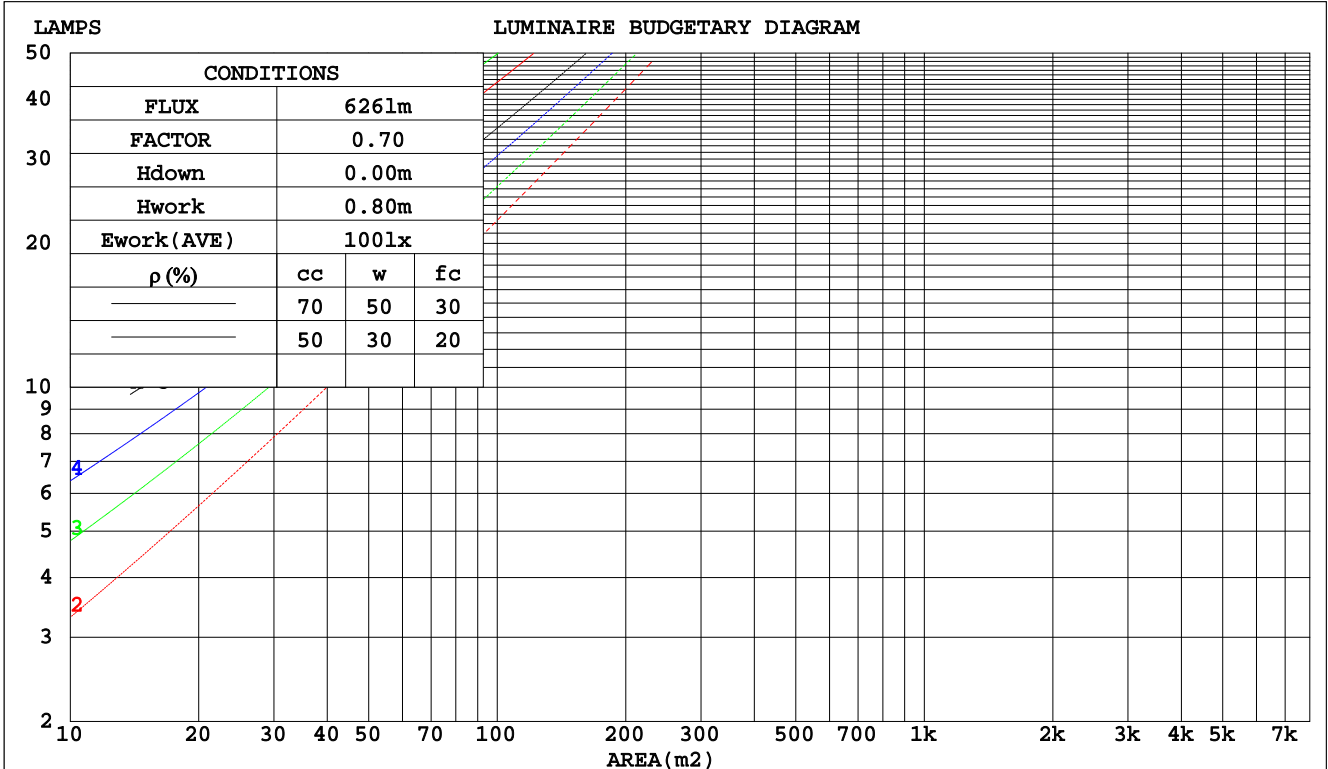

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Dillon
 Test Date:25 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:6.950m [K=1.0000]
 Remarks:

WEC AND CCEC

NAME: x-Glo-44-36vDC-1M	TYPE: /	WEIGHT: 0.129kg/m
SPEC.:	DIM.: 6*15.5mm	SERIAL No.:
MFR.: CLEAR	SUR.: 15.5*1000mm	Shielding Angle: /

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.342	.194	.062	.333	.190	.060	.316	.181	.058	.301	.173	.056	.287	.166	.054	
2.0	.312	.171	.052	.304	.167	.052	.289	.161	.050	.275	.154	.048	.263	.149	.047	
3.0	.284	.151	.045	.277	.149	.045	.264	.143	.043	.252	.138	.042	.240	.133	.041	
4.0	.260	.135	.040	.254	.133	.039	.242	.128	.038	.231	.124	.037	.221	.120	.037	
5.0	.239	.122	.035	.233	.120	.035	.223	.116	.034	.213	.112	.033	.203	.109	.033	
6.0	.221	.111	.032	.216	.109	.031	.206	.106	.031	.197	.102	.030	.189	.099	.029	
7.0	.205	.101	.029	.200	.100	.028	.192	.097	.028	.183	.094	.027	.176	.091	.027	
8.0	.191	.093	.026	.187	.092	.026	.179	.089	.026	.171	.087	.025	.164	.084	.025	
9.0	.178	.086	.024	.175	.085	.024	.168	.083	.023	.161	.081	.023	.154	.078	.023	
10.0	.167	.080	.022	.164	.079	.022	.158	.077	.022	.151	.075	.021	.146	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.235	.235	.235	.201	.201	.201	.137	.137	.137	.079	.079	.079	.025	.025	.025	
1.0	.227	.200	.176	.194	.172	.152	.133	.118	.105	.076	.068	.061	.024	.022	.020	
2.0	.219	.176	.140	.188	.152	.121	.129	.105	.084	.074	.061	.049	.024	.020	.016	
3.0	.211	.159	.116	.181	.137	.101	.124	.095	.071	.072	.055	.042	.023	.018	.014	
4.0	.204	.145	.101	.175	.126	.088	.120	.088	.062	.070	.051	.036	.022	.017	.012	
5.0	.196	.135	.090	.168	.117	.078	.116	.082	.055	.067	.048	.033	.022	.016	.011	
6.0	.189	.127	.082	.162	.110	.072	.112	.077	.051	.065	.045	.030	.021	.015	.010	
7.0	.182	.120	.076	.156	.104	.067	.108	.073	.047	.063	.043	.028	.020	.014	.009	
8.0	.175	.114	.072	.151	.099	.063	.104	.069	.045	.061	.041	.027	.020	.013	.009	
9.0	.169	.109	.069	.145	.095	.060	.101	.066	.042	.059	.039	.025	.019	.013	.008	
10.0	.163	.105	.066	.140	.091	.058	.097	.064	.041	.057	.038	.024	.018	.012	.008	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Dillon
 Test Date:25 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:6.950m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

NAME: x-Glo-44-36vDC-1M	TYPE: /	WEIGHT: 0.129kg/m
SPEC.:	DIM.: 6*15.5mm	SERIAL No.:
MFR.: CLEAR	SUR.: 15.5*1000mm	Shielding Angle: /

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.4	22.9	21.7	23.2	23.5	23.5	25.0	23.8	25.3	25.6
3H	22.4	23.8	22.8	24.2	24.5	25.4	26.8	25.8	27.1	27.4
4H	22.8	24.1	23.2	24.4	24.8	26.3	27.6	26.7	28.0	28.4
6H	23.0	24.2	23.4	24.6	25.0	27.2	28.4	27.6	28.8	29.2
8H	23.0	24.2	23.4	24.5	24.9	27.6	28.8	28.0	29.2	29.6
12H	22.9	24.1	23.4	24.5	24.9	27.9	29.1	28.3	29.5	29.9
4H 2H	22.4	23.7	22.7	24.0	24.4	23.9	25.2	24.3	25.6	25.9
3H	23.7	24.8	24.1	25.2	25.6	26.1	27.2	26.5	27.6	28.0
4H	24.2	25.2	24.6	25.6	26.1	27.2	28.2	27.6	28.7	29.1
6H	24.5	25.4	25.0	25.9	26.3	28.3	29.2	28.7	29.6	30.1
8H	24.5	25.4	25.0	25.9	26.4	28.7	29.6	29.2	30.1	30.6
12H	24.5	25.4	25.1	25.8	26.4	29.1	29.9	29.7	30.4	31.0
8H 4H	24.8	25.7	25.3	26.2	26.7	27.4	28.3	27.9	28.7	29.2
6H	25.4	26.1	25.9	26.6	27.2	28.7	29.4	29.2	29.9	30.5
8H	25.6	26.2	26.1	26.8	27.3	29.3	30.0	29.8	30.5	31.0
12H	25.7	26.3	26.3	26.8	27.4	29.9	30.5	30.5	31.0	31.6
12H 4H	25.0	25.8	25.5	26.3	26.8	27.4	28.2	27.9	28.7	29.2
6H	25.7	26.3	26.2	26.8	27.4	28.8	29.4	29.3	29.9	30.5
8H	26.0	26.5	26.5	27.1	27.7	29.4	30.0	30.0	30.5	31.1
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.1				
1.5H	+ 0.3 / - 0.5					+ 0.2 / - 0.2				
2.0H	+ 0.3 / - 0.6					+ 0.1 / - 0.2				

CIE Pub.117, 616.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.7)
 Area: 0.0155 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Dillon
 Test Date:25 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:6.950m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

NAME: x-Glo-44-36vDC-1M	TYPE: /	WEIGHT: 0.129kg/m
SPEC.:	DIM.: 6*15.5mm	SERIAL No.:
MFR.: CLEAR	SUR.: 15.5*1000mm	Shielding Angle: /


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	55	43	36	54	42	35	53	42	35	28
0.80	65	52	45	64	52	45	61	51	44	37
1.00	73	61	53	72	61	53	69	62	52	45
1.25	80	69	61	79	68	61	75	66	60	51
1.50	85	75	67	83	74	66	80	71	65	56
2.00	93	83	76	90	82	75	86	79	73	64
2.50	97	88	81	94	86	80	90	83	78	68
3.00	100	93	86	98	91	85	93	87	82	72
4.00	105	98	93	102	96	91	97	92	88	77
5.00	107	102	97	104	99	95	99	95	91	80
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Dillon
 Test Date:25 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:6.950m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: x-G10-44-36vDC-1M	TYPE: /	WEIGHT: 0.129kg/m
SPEC.:	DIM.: 6*15.5mm	SERIAL No.:
MFR.: CLEAR	SUR.: 15.5*1000mm	Shielding Angle: /

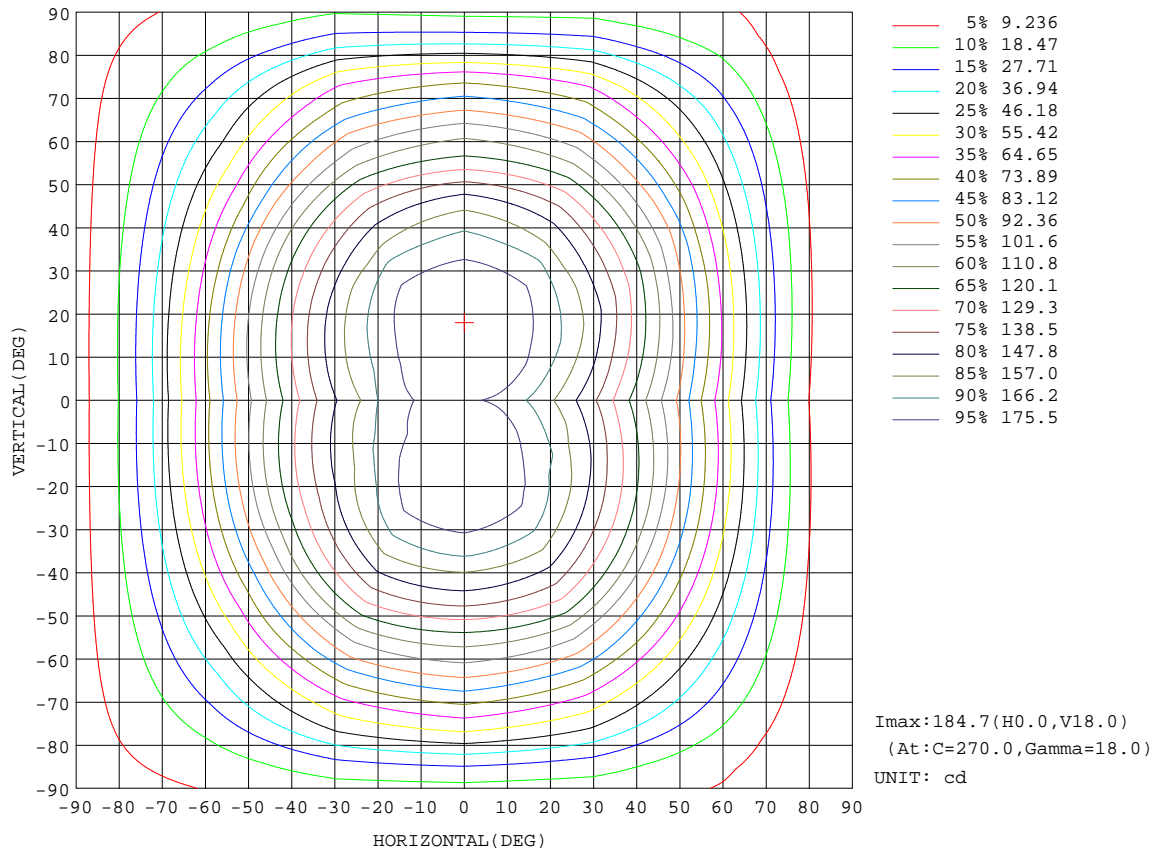


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Dillon
 Test Date: 25 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 6.950m [K=1.0000]
 Remarks:

AAI Figure

NAME: x-Glo-44-36vDC-1M	TYPE: /	WEIGHT: 0.129kg/m
SPEC.:	DIM.: 6*15.5mm	SERIAL No.:
MFR.: CLEAR	SUR.: 15.5*1000mm	Shielding Angle: /

Flux out:504.7 lm

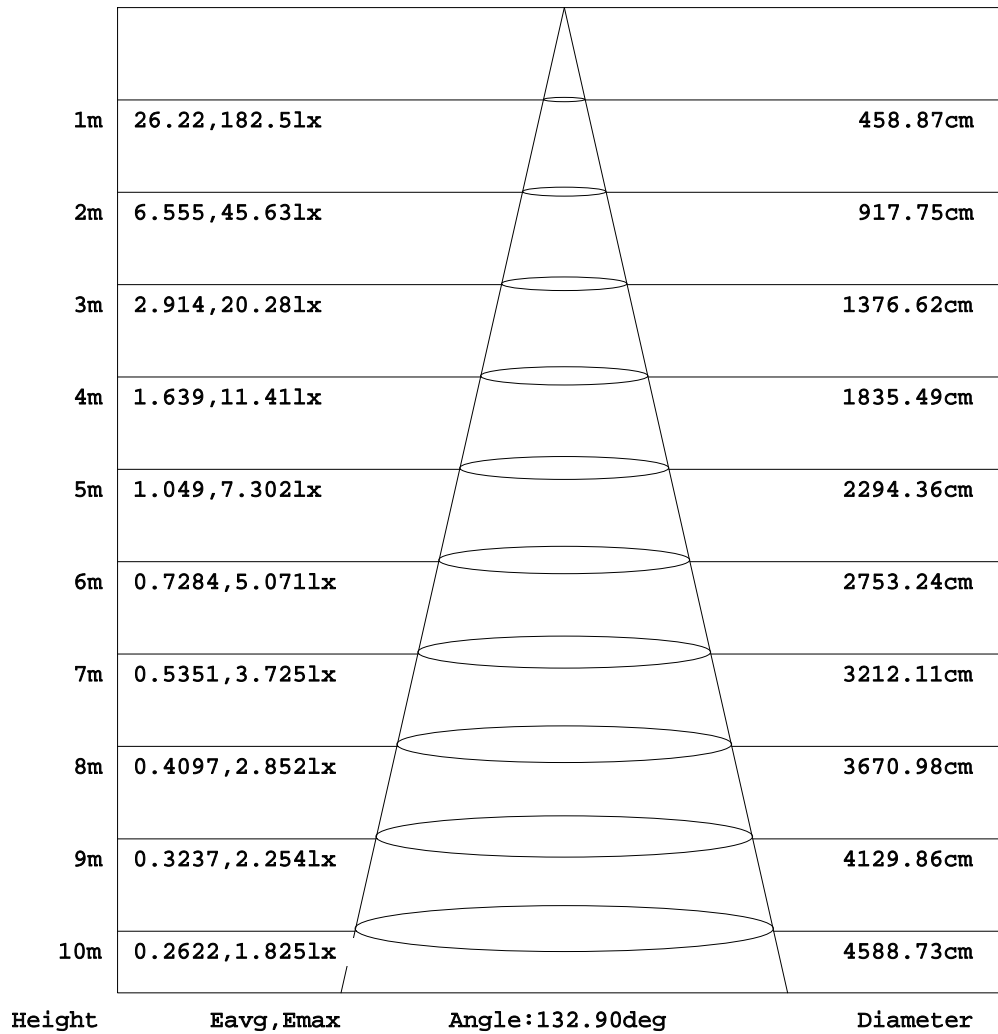


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Dillon
 Test Date:25 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:6.950m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: x-Glo-44-36vDC-1M	TYPE: /	WEIGHT: 0.129kg/m
SPEC.:	DIM.: 6*15.5mm	SERIAL No.:
MFR.: CLEAR	SUR.: 15.5*1000mm	Shielding Angle: /

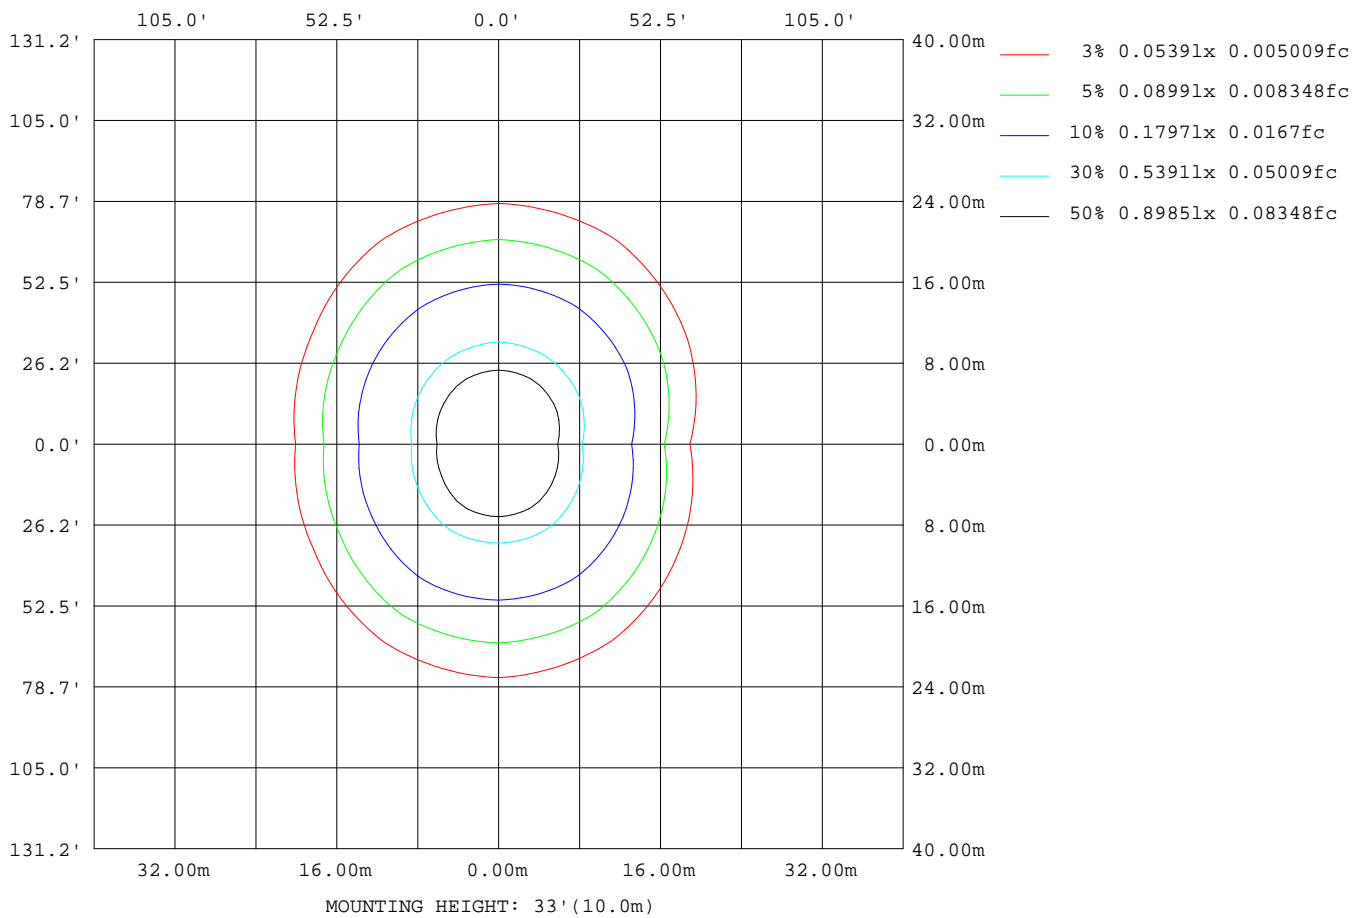

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Dillon
 Test Date: 25 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 6.950m [K=1.0000]
 Remarks:

LED Avg.L Report

NAME: x-Glo-44-36vDC-1M	TYPE: /	WEIGHT: 0.129kg/m
SPEC.:	DIM.: 6*15.5mm	SERIAL No.:
MFR.: CLEAR	SUR.: 15.5*1000mm	Shielding Angle: /


AvgL	cd/m2
L_0~180(65)av	7852
L_0~180(75)av	6143
L_0~180(85)av	4980
L_90~270(65)av	14482
L_90~270(75)av	16222
L_90~270(85)av	20672
L_45(65)av	11974
L_45(75)av	12558
L_45(85)av	16578

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Dillon
 Test Date:25 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:6.950m [K=1.0000]
 Remarks:

Planar Illuminance Curve

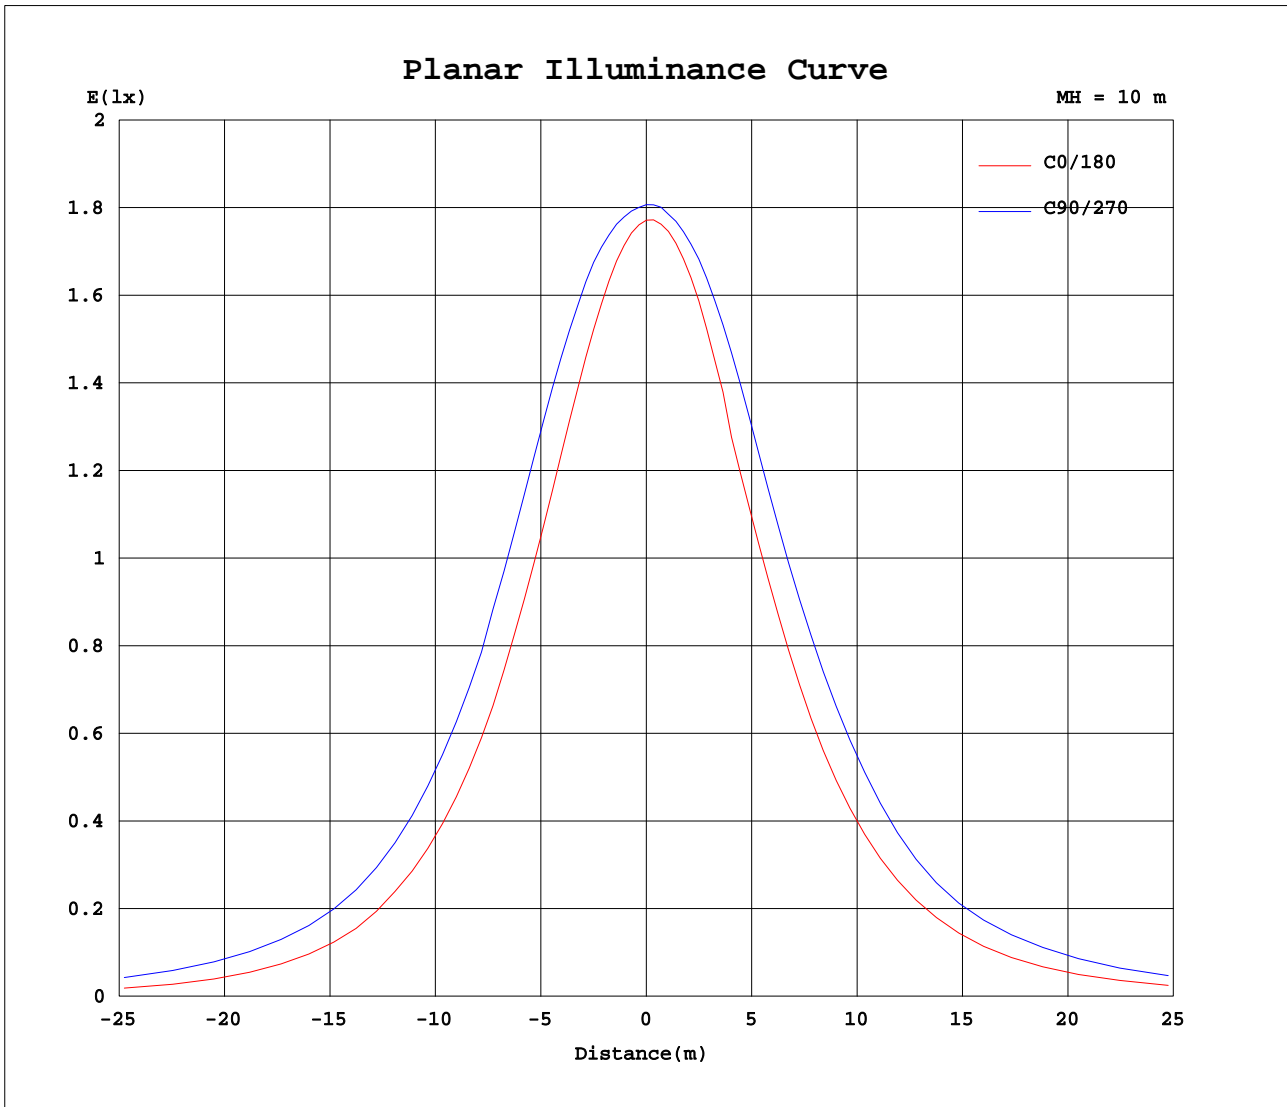

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Dillon
 Test Date: 25 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 6.950m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: x-Glo-44-36vDC-1M	TYPE: /	WEIGHT: 0.129kg/m
SPEC.:	DIM.: 6*15.5mm	SERIAL No.:
MFR.: CLEAR	SUR.: 15.5*1000mm	Shielding Angle: /

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	181	181	181	181	181	181	181	181	181	181	181	181							
5	179	180	180	181	181	180	181	181	182	182	181	181							
10	175	177	180	182	181	178	180	179	182	183	181	179							
15	170	174	181	184	182	176	178	177	183	184	182	177							
20	162	169	180	183	180	171	170	172	182	185	181	172							
25	155	165	178	182	178	167	160	167	180	184	179	168							
30	143	154	172	177	173	156	150	160	175	179	174	161							
35	133	147	166	171	167	149	142	153	170	174	169	154							
40	118	134	153	157	155	138	128	141	157	165	157	142							
45	108	125	144	148	146	128	118	132	149	157	149	132							
50	92.1	108	129	132	131	113	102	117	134	141	135	117							
55	78.1	96.5	117	120	118	101	90.5	106	123	128	123	106							
60	60.3	77.8	98.5	104	100	82.1	72.4	86.8	105	113	106	87.8							
65	47.9	65.6	86.7	93.4	88.5	69.7	60.6	73.0	95.2	102	95.3	74.0							
70	31.0	48.5	67.5	75.7	69.6	52.2	43.1	55.8	77.5	84.7	77.8	55.8							
75	21.3	38.2	56.5	63.9	58.0	41.6	32.6	45.0	67.7	72.6	67.1	44.7							
80	9.27	24.6	39.4	44.8	41.2	27.9	19.3	30.9	47.4	48.2	45.6	29.5							
85	3.46	16.2	26.8	30.4	28.1	18.9	12.2	21.4	32.5	31.9	30.8	19.9							
90	0.26	8.57	14.8	16.1	15.3	9.49	5.14	11.5	17.8	16.6	16.1	10.5							
95	0.14	7.71	12.3	12.6	11.9	6.90	2.66	9.22	13.8	12.8	12.4	8.95							
100	0.19	7.06	11.3	11.9	10.3	6.36	0.20	6.50	11.5	11.3	11.3	7.87							
105	0.28	6.43	10.5	11.2	9.21	6.01	0.12	5.86	9.48	10.4	10.4	6.75							
110	0.46	5.54	9.60	10.3	8.28	5.68	0.16	5.08	8.45	9.13	8.86	5.45							
115	0.58	4.51	9.01	9.97	7.54	4.44	0.15	3.79	7.05	8.56	7.94	4.65							
120	0.69	3.20	7.53	9.00	6.14	3.00	0.18	2.79	5.46	7.88	7.10	3.88							
125	0.80	2.74	6.64	7.94	5.03	2.44	0.23	2.69	5.12	7.79	6.96	3.82							
130	0.94	1.98	6.12	7.20	4.61	1.83	0.29	2.55	6.32	8.79	8.17	3.39							
135	1.08	1.41	6.17	6.90	4.62	1.34	0.33	1.85	6.97	10.4	8.99	2.56							
140	1.27	0.71	6.44	8.04	5.11	0.76	0.44	0.99	6.08	9.60	8.44	1.04							
145	1.41	0.65	5.28	7.90	4.25	0.65	0.52	0.83	4.95	9.22	7.31	0.95							
150	1.51	0.71	1.69	5.36	1.75	0.70	1.10	1.15	2.37	5.55	3.31	0.85							
155	1.58	0.73	0.91	1.78	0.83	0.70	1.11	1.30	1.46	3.48	2.05	0.79							
160	1.60	0.78	0.79	0.76	0.71	0.72	1.19	1.25	1.00	1.20	1.43	0.79							
165	1.60	0.84	0.80	0.75	0.72	0.75	1.28	1.21	1.42	0.97	1.24	0.82							
170	1.58	0.87	0.81	0.76	0.77	0.80	1.39	1.16	1.24	0.81	0.97	0.84							
175	1.56	1.00	0.84	0.78	0.82	0.83	1.47	1.17	1.15	0.81	0.93	0.87							
180	1.54	1.15	0.96	0.83	0.88	0.85	1.54	1.10	0.97	0.83	0.86	0.85							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Dillon
 Test Date:25 June 2023

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:6.950m [K=1.0000]
 Remarks: